





# Abbruchhämmer


**B 12 II - B 55 II**

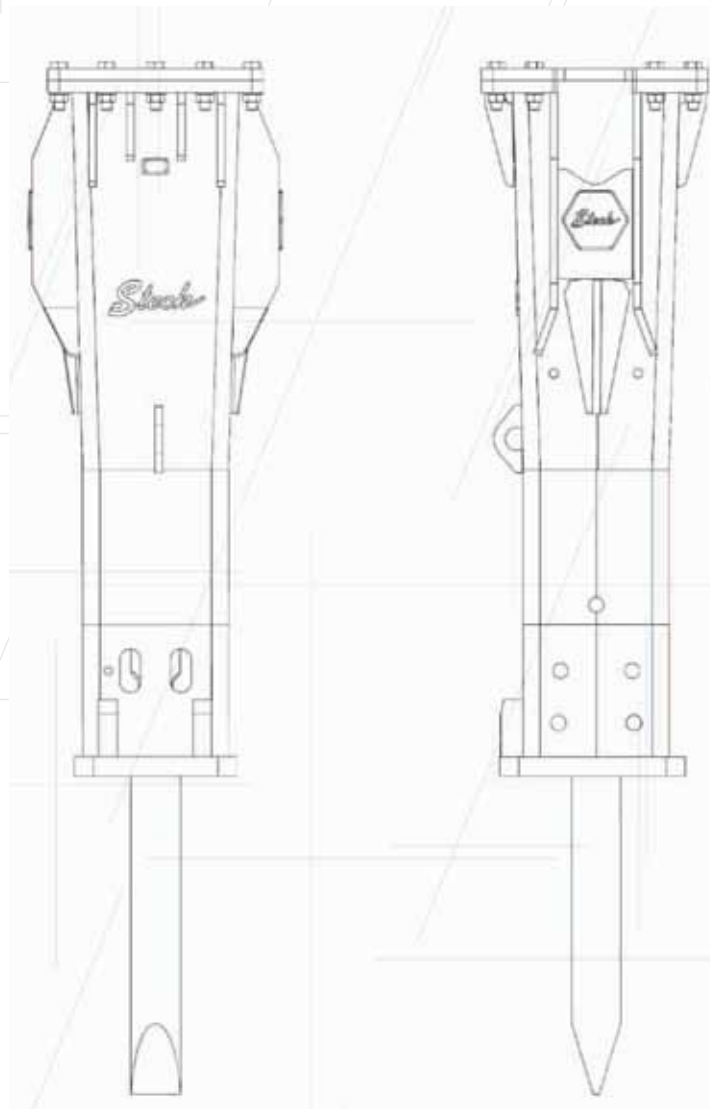


## **NEUE Steck Abbruchhämmer**

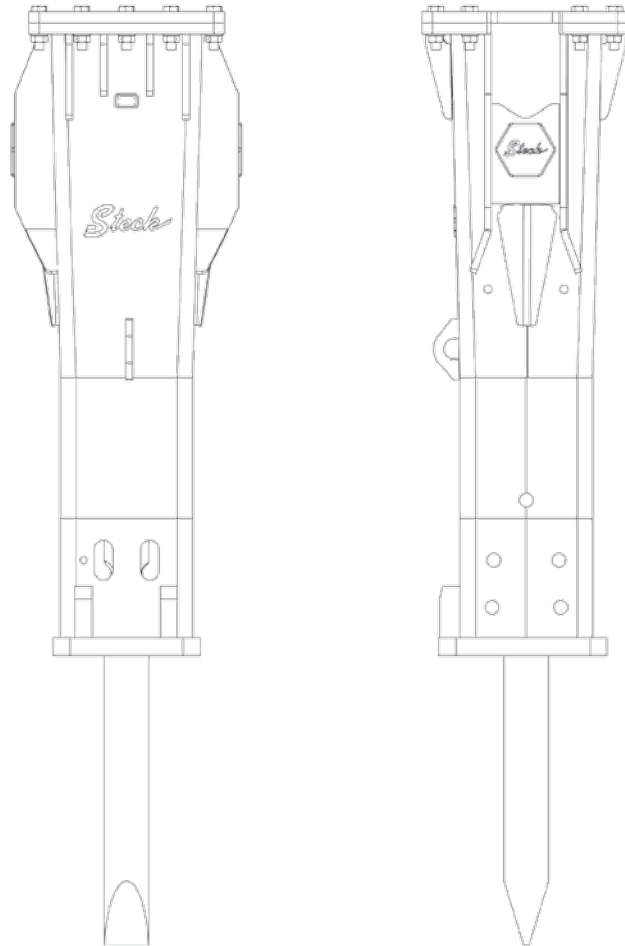

<b>Technische Daten</b>	<b>B 12 II</b>	<b>B 15 II</b>	<b>B 17 II</b>	<b>B 22 II</b>
Baggerdienstgewicht (t)	14 - 18	18 - 25	22 - 28	25 - 32
Gewicht, Box (kg)	1200	1500	1734	2250
Betriebsdruck (bar)	120 - 140	120 - 140	120 - 140	130 - 150
Ölliefermenge (l/min)	80 - 100	110 - 150	130 - 150	170 - 200
Ø Meißel (mm)	110	120	130	140
Schlagenergie (bpm)	400 - 500	400 - 500	400 - 500	400 - 500
Druckleitung in mm(in)	19 (3/4)	25 (1)	25 (1)	25 (1)
Rücklaufleitung mm(in)	25 (1)	25 (1)	25 (1)	32 (1 1/4)

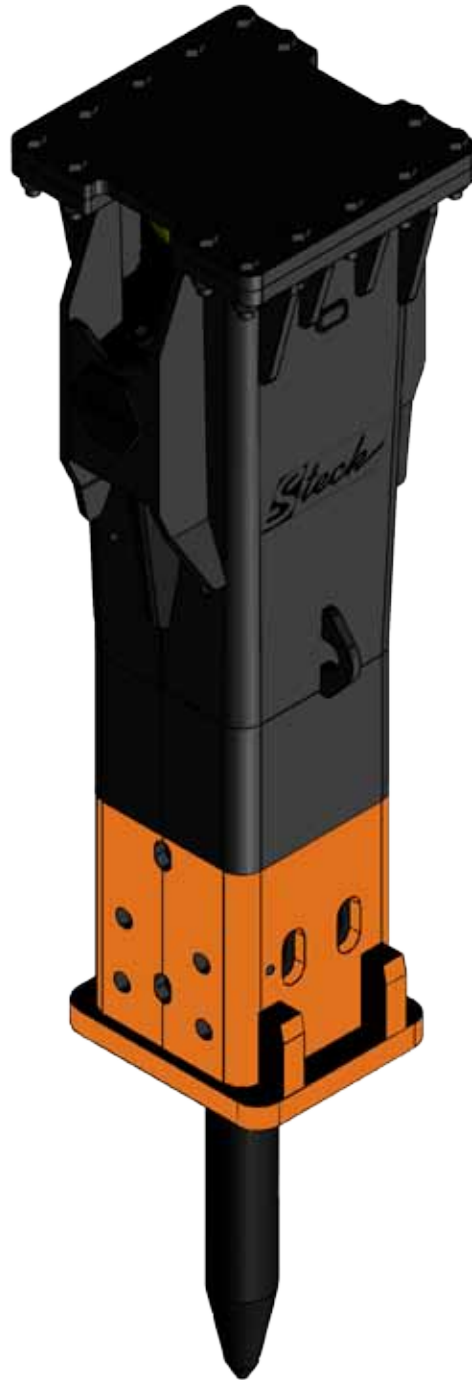

<b>Technische Daten</b>	<b>B 30 II</b>	<b>B 40 II</b>	<b>B 55 II</b>
Baggerdienstgewicht (t)	30 - 45	40 - 55	50 - 75
Gewicht, Box (kg)	3030	3770	5600
Betriebsdruck (bar)	130 - 150	130 - 150	130 - 150
Ölliefermenge (l/min)	190 - 220	210 - 240	250 - 305
Ø Meißel (mm)	160	170	180
Schlagenergie (bpm)	300 - 450	300 - 400	300 - 400
Druckleitung in mm(in)	25 (1)	25 (1)	32 (1 1/4)
Rücklaufleitung mm(in)	32 (1 1/4)	32 (1 1/4)	38 (1 1/2)

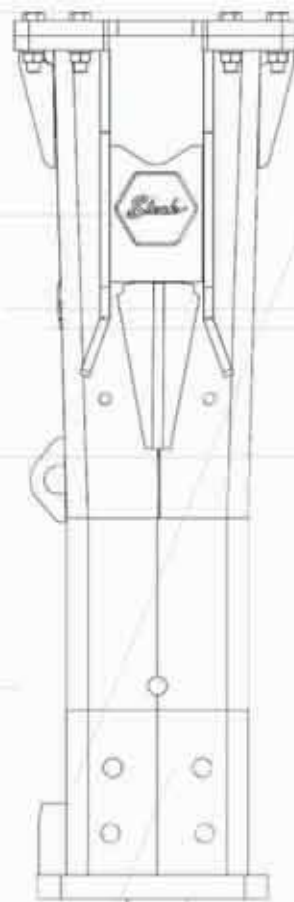

Ihr Ansprechpartner:

Steck Abbruchgeräte GmbH

Hauptstr. 20

D- 89192 Rammingen

Gerichtsstand: Ulm/ Donau HRB 726131

Ust.- ID Nr.: DE275269830

Tel. +49 (0) 7345 9123 - 0

Fax +49 (0) 7345 9123 - 20

E-Mail [info@steck.de](mailto:info@steck.de)

Internet [www.steck.de](http://www.steck.de)