




dust protection wall



dust protection wall

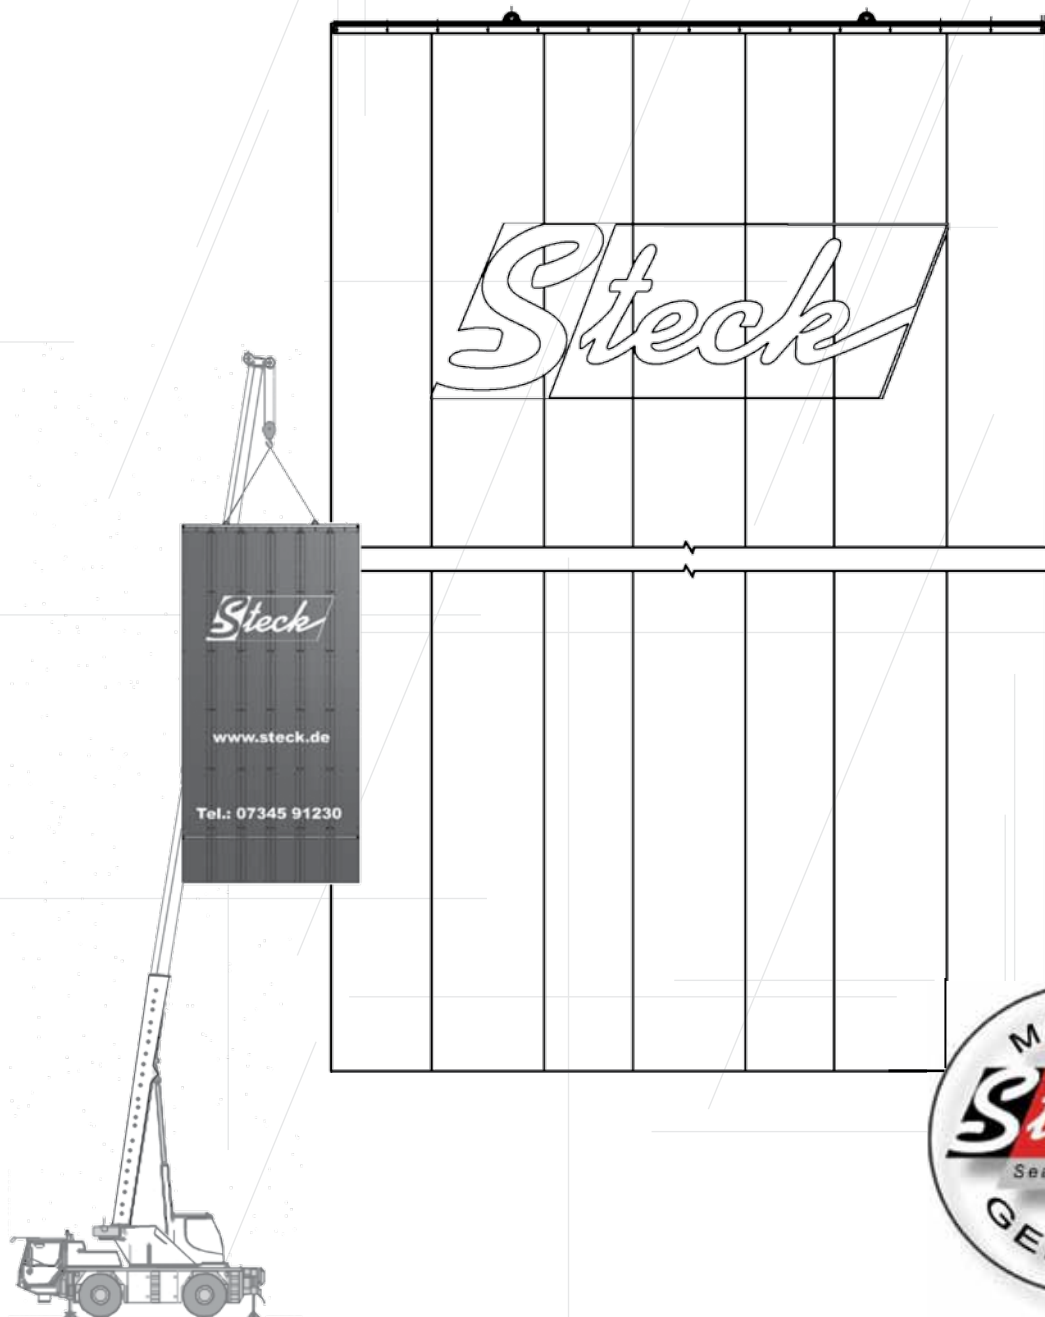

Technical data

truck crane (to)	80
weight (to)	1.5
total height (m)	12
total width (m)	6

The building owner has the responsibility for dust emission, so he has to look for suitable measures for dust prevention and reduction (see § 22 Abs. 1 BImSchG - Federal Immission Control Act).

- the dust prevention or reduction for provision of health risks or considerable nuisance for workers or third persons.

- to deal with possible effects and interactions of the building site. This applies not only for following persons: Local residents, bystanders, children, workers of other companies or patients, also environment (ground, air, groundwater) has to be respected.



- at site planning and equipment you have to look for the construction phases which are dust intensive, in particular releases of hazardous material. Then dust reducing suitable measures have to be established and implemented consequently.

- and little split-offs of concrete

The dust protection wall has the function to reduce dust emission and to protect for little split-offs of concrete.



WARNING !

Violations of dust reducing suitable measures according to the technical standards can result in a decommissioning of the building site (§ 25 Abs. 1 BImSchG).

Steck



your contact person::

Steck Abbruchgeräte GmbH
Hauptstr. 20
D- 89192 Rammingen

place of jurisdiction: Ulm/Donau HRB 726131
VAT- ID No.: DE275269830
phone +49 (0) 7345 9123 - 0
fax +49 (0) 7345 9123 - 20
mail info@steck.de
internet www.steck.de